

Riemannian geometry for statistical estimation and learning: applications to remote sensing and M/EEG

Antoine Collas

S3 seminar - L2S, CentraleSupélec

Inria



université
PARIS-SACLAY

- **2019-2022: PhD in Signal processing**
SONDRA laboratory, CentraleSupélec, University of Paris-Saclay
Directors: Jean-Philippe Ovarlez, Guillaume Ginolhac

- **2022 - Present: Postdoctoral Researcher in Machine Learning**
Mind team (ex-Parietal) at Inria Saclay
Advisors: Alexandre Gramfort, Rémi Flamary

Table of contents

1. Context
2. Riemannian geometry and problematics
3. Estimation and classification of non centered and heteroscedastic data
4. Probabilistic PCA from heteroscedastic signals
5. Aligning M/EEG data to enhance predictive regression modeling

Context

Context in remote sensing

In recent years, many image time series have been taken from the **earth** with different technologies: **SAR, multi/hyper spectral imaging, ...**

Objective

Segment semantically these data using **sensor diversity** (spectral bands, polarization...), and **spatial** and/or **temporal** informations.

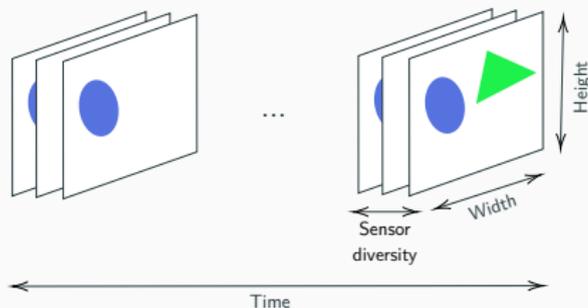


Figure 1: Multivariate image time series.

Applications

Activity monitoring, land cover mapping, crop type mapping, disaster assessment ...

Context in neuroscience

Many new datasets are available in neuroscience: **EEG, MEG, fMRI, ...**

Objectives

- **Classify** brain signals into different **cognitive states** (sleep, wake, anesthesia, seizure, ...).
- **Regress** biomarkers (e.g. age) from brain signals.

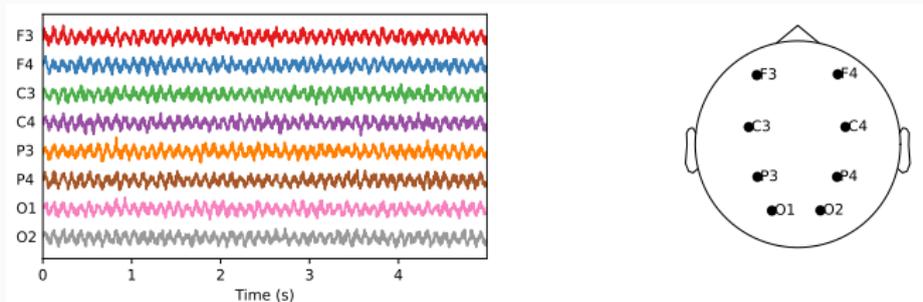


Figure 2: Multivariate EEG time series and the sensor locations.

Applications

Brain-computer interfaces, sleep monitoring, brain aging, ...

Classification and regression pipeline

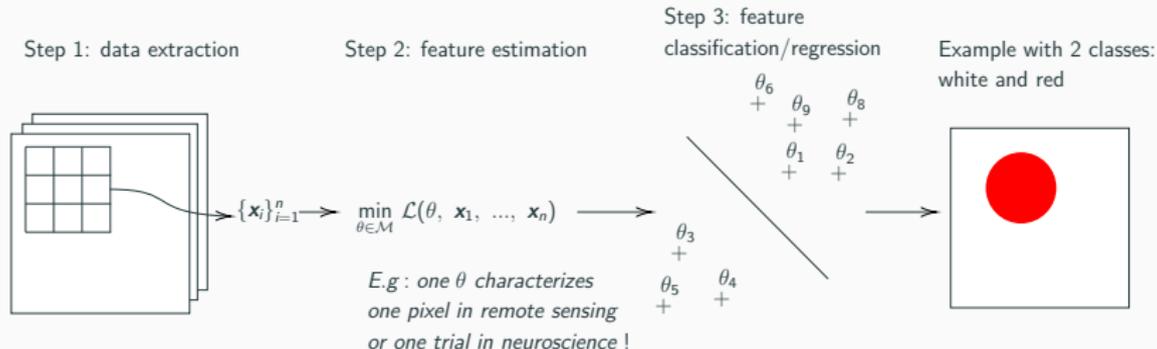


Figure 3: Classification and regression pipeline.

Assumption:

$\mathbf{x} \sim f(\cdot; \theta)$, a parametric probability density function, $\theta \in \mathcal{M}$

Examples of θ :

$\theta = \Sigma$ a covariance matrix, $\theta = (\mu, \Sigma)$ a vector and a covariance matrix,
 $\theta = (\{\tau_{ij}\}, \mathbf{U})$ a scalar and an orthogonal matrix...

\mathcal{M} can be constrained !

Step 2: objectives for feature estimation

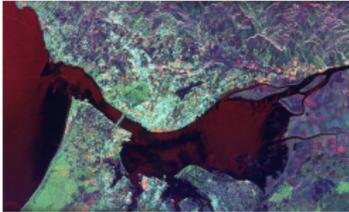


Figure 4: Example of a SAR image (from `nasa.gov`).




Figure 5: Example of a hyperspectral image (from `nasa.gov`).

Objectives:

- develop **robust estimators**, *i.e.* estimators for non Gaussian or heterogeneous data because of the high resolution of images and the presence of outliers in biosignals,
- develop **regularized/structured estimators**, *i.e.* estimators that handle the high dimension of hyperspectral images and MEG.

Step 3: objectives for classification and regression

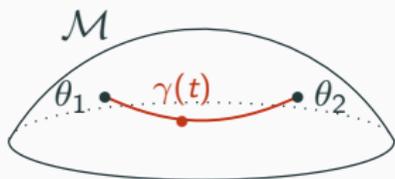


Figure 6: Divergence δ_γ : squared length of the curve γ .

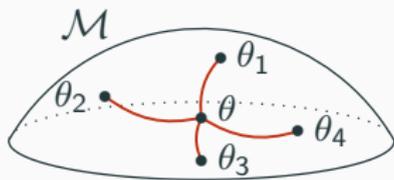


Figure 7: Center of mass of $\{\theta_i\}_{i=1}^M$.

Objectives:

Develop divergences that

- **respect the constraints** of \mathcal{M} ,
- are **related to the chosen statistical distributions**,
- are robust to **distribution shifts** between train and test data.

Use normalizations on \mathcal{M} to fix **distribution shifts** between train and test sets.

Classification and regression pipeline and Riemannian geometry

Random variable: $\mathbf{x} \sim f(\cdot; \theta)$, $\theta \in \mathcal{M}$

Step 2: maximum likelihood estimation

$$\underset{\theta \in \mathcal{M}}{\text{minimize}} \mathcal{L}(\theta | \{\mathbf{x}_i\}_{i=1}^n) = -\log f(\{\mathbf{x}_i\}_{i=1}^n; \theta)$$

Step 3: given δ , center of mass of $\{\theta_i\}_{i=1}^M$


$$\underset{\theta \in \mathcal{M}}{\text{minimize}} \sum_i \delta(\theta, \theta_i)$$

Use of Riemannian geometry:

- optimization under constraints,
- “Fisher information metric” \implies a canonical Riemannian manifold for the parameter space \mathcal{M} (fast estimators, intrinsic Cramér-Rao bounds...),
- δ : squared Riemannian distance.

Riemannian geometry and problematics

What is a Riemannian manifold ?

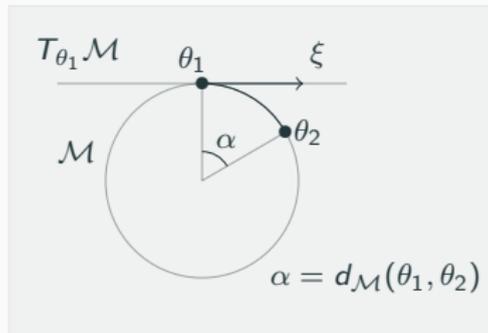

Curvature induced by:

- constraints, e.g. the sphere: $\|\mathbf{x}\| = 1$,
- Riemannian metric, e.g. on \mathcal{S}_p^{++} :
$$\langle \xi, \eta \rangle_{\Sigma^p}^{\mathcal{S}_p^{++}} = \text{Tr}(\Sigma^{-1} \xi \Sigma^{-1} \eta).$$

Some geometric tools:

- **tangent space** $T_\theta \mathcal{M}$ (vector space): linearization of \mathcal{M} at $\theta \in \mathcal{M}$,
- **Riemannian metric** $\langle \cdot, \cdot \rangle_\theta^{\mathcal{M}}$: inner product on $T_\theta \mathcal{M}$,
- **geodesic** γ : curve on \mathcal{M} with zero acceleration,
- **distance**: $d_{\mathcal{M}}(\theta_1, \theta_2) = \text{length of } \gamma$.


Examples of \mathcal{M} : $\mathbb{R}^{p \times k}$, the sphere S^{p-1} , symmetric positive definite matrices \mathcal{S}_p^{++} , orthonormal k -frames $\text{St}_{p,k}$, low-rank matrices, ...

Optimization on a manifold

Optimization

$\mathcal{L} : \mathcal{M} \rightarrow \mathbb{R}$, smooth

minimize $\mathcal{L}(\theta)$
 $\theta \in \mathcal{M}$

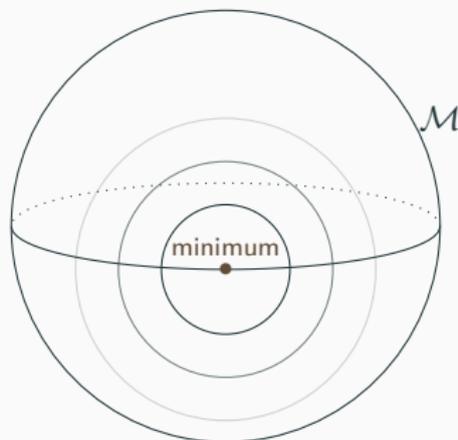


Optimization on a manifold

Optimization

$\mathcal{L} : \mathcal{M} \rightarrow \mathbb{R}$, smooth

$$\underset{\theta \in \mathcal{M}}{\text{minimize}} \mathcal{L}(\theta)$$

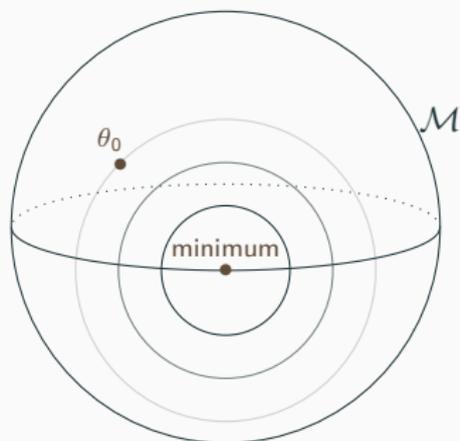


Optimization on a manifold

Optimization

$\mathcal{L} : \mathcal{M} \rightarrow \mathbb{R}$, smooth

minimize $\mathcal{L}(\theta)$
 $\theta \in \mathcal{M}$

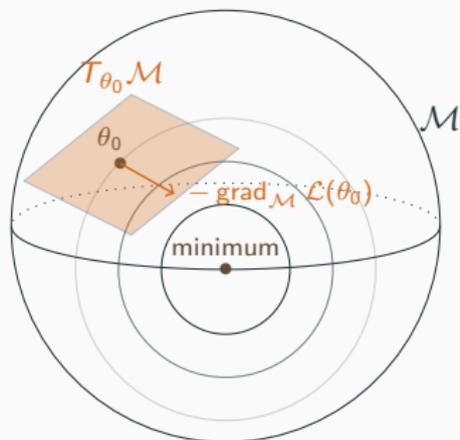


Optimization on a manifold

Optimization

$\mathcal{L} : \mathcal{M} \rightarrow \mathbb{R}$, smooth

minimize $\mathcal{L}(\theta)$
 $\theta \in \mathcal{M}$

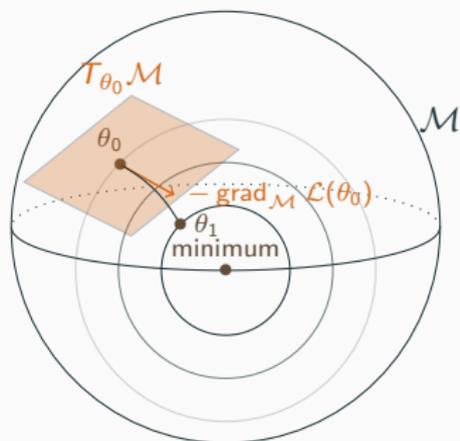

Fisher information metric

Random variable, negative log-likelihood

$$\mathbf{x} \sim f(\cdot; \theta), \quad \theta \in \mathcal{M}$$

$$\mathcal{L}(\theta|\mathbf{x}) = -\log f(\mathbf{x}; \theta)$$

Fisher information metric

$$\begin{aligned}\langle \xi, \eta \rangle_{\theta}^{\text{FIM}} &= \mathbb{E}_{\mathbf{x} \sim f(\cdot; \theta)} \left[D^2 \mathcal{L}(\theta|\mathbf{x}) [\xi, \eta] \right] \\ &= \text{vec}(\xi)^T I(\theta) \text{vec}(\eta)\end{aligned}$$

where

$$I(\theta) = \mathbb{E}_{\mathbf{x} \sim f(\cdot; \theta)} [\text{Hess } \mathcal{L}(\theta|\mathbf{x})] \in \mathcal{S}_p^{++}$$

is the Fisher information matrix.

(Set of constraints, Fisher information metric) = a Riemannian manifold

Existing work: centered Gaussian

A well known geometry:

$$\mathbf{x} \sim \mathcal{N}(\mathbf{0}, \boldsymbol{\Sigma}), \quad \boldsymbol{\Sigma} \in \mathcal{S}_p^{++}$$

with the Fisher information metric:

$$\langle \boldsymbol{\xi}, \boldsymbol{\eta} \rangle_{\boldsymbol{\Sigma}}^{\text{FIM}} = \text{Tr} \left(\boldsymbol{\Sigma}^{-1} \boldsymbol{\xi} \boldsymbol{\Sigma}^{-1} \boldsymbol{\eta} \right).$$

Induced pipeline

Step 2:

$$\hat{\boldsymbol{\Sigma}}_{\text{SCM}} = \frac{1}{n} \sum_{i=1}^n \mathbf{x}_i \mathbf{x}_i^T.$$

Step 3: geodesic distance on \mathcal{S}_p^{++}

$$d_{\mathcal{S}_p^{++}}(\boldsymbol{\Sigma}_1, \boldsymbol{\Sigma}_2) = \left\| \log \left(\boldsymbol{\Sigma}_1^{-\frac{1}{2}} \boldsymbol{\Sigma}_2 \boldsymbol{\Sigma}_1^{-\frac{1}{2}} \right) \right\|_2.$$

Riemannian gradient descent to solve:

$$\underset{\boldsymbol{\Sigma} \in \mathcal{S}_p^{++}}{\text{minimize}} \sum_i d_{\mathcal{S}_p^{++}}^2(\boldsymbol{\Sigma}, \boldsymbol{\Sigma}_i).$$

Alexandre Barachant et al. “Multiclass Brain–Computer Interface Classification by Riemannian Geometry”. In: *IEEE Transactions on Biomedical Engineering* 59.4 (2012), pp. 920–928

Go beyond $x \sim \mathcal{N}(\mathbf{0}, \Sigma)$


- $\mathbf{x}_i \sim \mathcal{N}(\boldsymbol{\mu}, \tau_i \boldsymbol{\Sigma})$ for non-centered data and robustness,
- $\mathbf{x}_i \sim \mathcal{N}(\mathbf{0}, \tau_i \mathbf{U}\mathbf{U}^T + \mathbf{I}_p)$ for high dimensional data and robustness.

Problems

- Existence of maximum likelihood estimators ?
- Not always closed form estimators: how to get fast iterative algo. ?
- Not always closed form expression of the Riemannian distance: what to do ?
- How to get fast estimators of centers of mass ?

Estimation and classification of non centered and heteroscedastic data

Non-centered mixtures of scaled Gaussian distributions

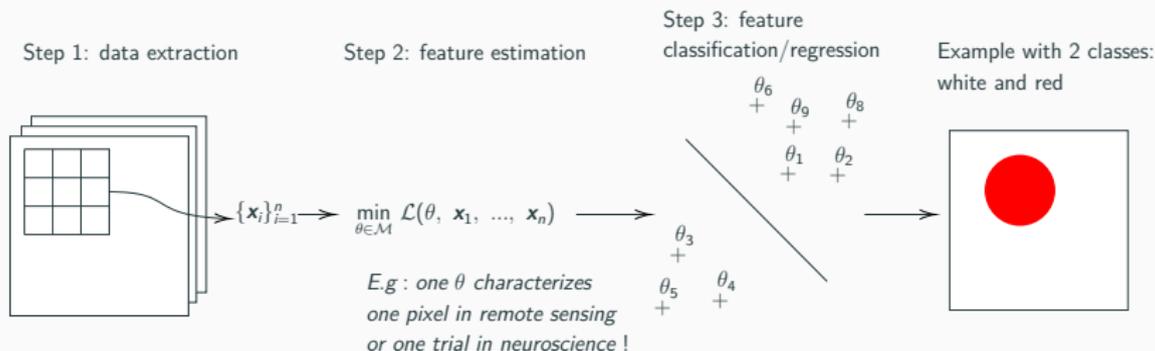

Non-centered mixtures of scaled Gaussian distributions (NC-MSGs)

Let $\mathbf{x}_1, \dots, \mathbf{x}_n \in \mathbb{R}^p$ distributed as $\mathbf{x}_i \sim \mathcal{N}(\boldsymbol{\mu}, \tau_i \boldsymbol{\Sigma})$ with $\boldsymbol{\mu} \in \mathbb{R}^p$, $\boldsymbol{\Sigma} \in \mathcal{S}_p^{++}$, and $\boldsymbol{\tau} \in (\mathbb{R}_*^+)^n$.

Goal: estimate and classify $\theta = (\boldsymbol{\mu}, \boldsymbol{\Sigma}, \boldsymbol{\tau})$.

Interesting when data are heteroscedastic (e.g. time series) and/or contain outliers.

Parameter space and cost functions

Parameter space: location, scatter matrix, and textures

$$\mathcal{M}_{p,n} = \mathbb{R}^p \times \mathcal{S}_p^{++} \times \mathcal{S}(\mathbb{R}_*^+)^n$$

where

$$\mathcal{S}(\mathbb{R}_*^+)^n = \left\{ \boldsymbol{\tau} \in (\mathbb{R}_*^+)^n : \prod_{i=1}^n \tau_i = 1 \right\}$$

- Positivity constraints: $\boldsymbol{\Sigma} \succ \mathbf{0}$, $\tau_i > 0$
- Scale constraint: $\prod_{i=1}^n \tau_i = 1$

Need generic optimization algorithms on $\mathcal{M}_{p,n}$.

Parameter estimation

Minimization of a regularized negative log-likelihood (NLL), $\beta \geq 0$

$$\underset{\theta \in \mathcal{M}_{p,n}}{\text{minimize}} \mathcal{L}(\theta | \{\mathbf{x}_i\}_{i=1}^n) + \beta \mathcal{R}_\kappa(\theta)$$

Center of mass estimation

Averaging parameters $\{\theta_i\}_{i=1}^M$ with a to be defined divergence δ

$$\underset{\theta \in \mathcal{M}_{p,n}}{\text{minimize}} \frac{1}{M} \sum_{i=1}^M \delta(\theta, \theta_i)$$

Parameter space with a product metric

Product metric

Let $\xi = (\xi_\mu, \xi_\Sigma, \xi_\tau)$, $\eta = (\eta_\mu, \eta_\Sigma, \eta_\tau)$ in the tangent space,



$$\langle \xi, \eta \rangle_{\theta}^{\mathcal{M}_{p,n}^{\text{Prod.}}} = \xi_\mu^T \eta_\mu + \text{Tr}(\Sigma^{-1} \xi_\Sigma \Sigma^{-1} \eta_\Sigma) + (\xi_\tau \odot \tau^{\odot -1})^T (\eta_\tau \odot \tau^{\odot -1})$$

where \odot is the elementwise operator.

Product manifold \implies easy derivation of the geometric tools

\implies Riemannian gradient descent and conjugate gradient on $(\mathcal{M}_{p,n}, \langle \cdot, \cdot \rangle_{\theta}^{\mathcal{M}_{p,n}^{\text{Prod.}}})$.

Slow in practice ...

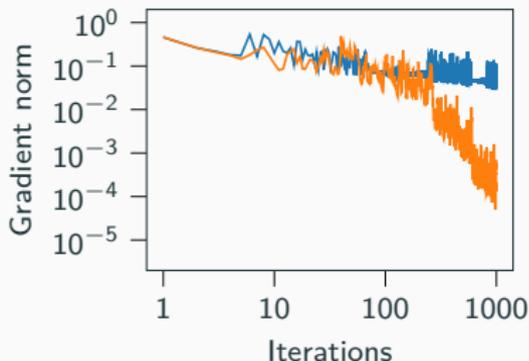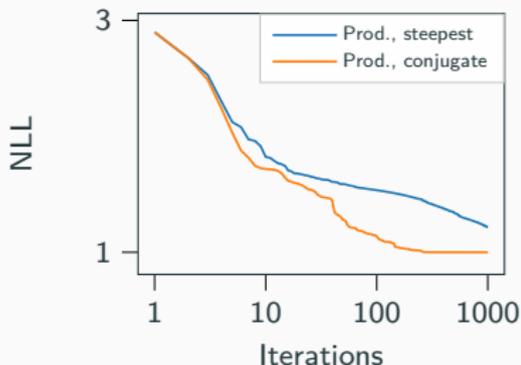

Parameter space with the Fisher information metric

Fisher information metric of NC-MSGs



Let $\xi = (\xi_\mu, \xi_\Sigma, \xi_\tau)$, $\eta = (\eta_\mu, \eta_\Sigma, \eta_\tau)$ in the tangent space,

$$\langle \xi, \eta \rangle_\theta^{\mathcal{M}_{p,n}^{\text{FIM}}} = \sum_{i=1}^n \frac{1}{\tau_i} \xi_\mu^T \Sigma^{-1} \eta_\mu + \frac{n}{2} \text{Tr}(\Sigma^{-1} \xi_\Sigma \Sigma^{-1} \eta_\Sigma) + \frac{p}{2} (\xi_\tau \odot \tau^{\odot -1})^T (\eta_\tau \odot \tau^{\odot -1})$$

Most geometric tools remain unknown like geodesics, distance ...

But, derivation of the Riemannian gradient and a second order retraction.

⇒ Riemannian gradient descent on $(\mathcal{M}_{p,n}, \langle \cdot, \cdot \rangle^{\mathcal{M}_{p,n}^{\text{FIM}}})$.

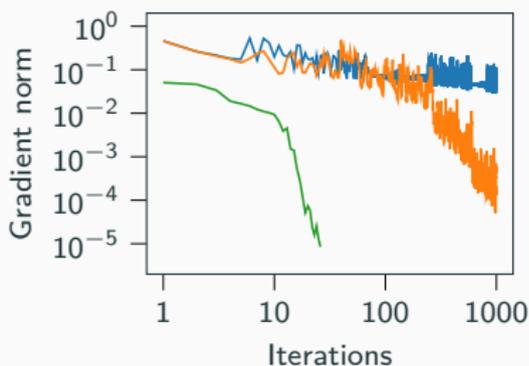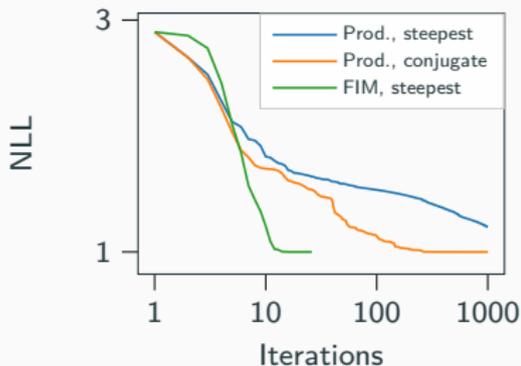

Parameter estimation: existence

Observation of sequences $(\theta^{(\ell)})_\ell$ such that

$$\mathcal{L}(\theta^{(\ell+1)}) < \mathcal{L}(\theta^{(\ell)}) \quad \text{and} \quad \theta^{(\ell)} \xrightarrow{\ell \rightarrow +\infty} \partial\theta$$

where $\partial\theta$ is a border of $\mathcal{M}_{p,n}$ (e.g. $\tau_i = 0$).

Existence of a regularized maximum likelihood estimator

Under some assumptions on \mathcal{R}_κ and $\beta > 0$, the regularized NLL

$$\theta \mapsto \mathcal{L}(\theta | \{\mathbf{x}_i\}_{i=1}^n) + \beta \mathcal{R}_\kappa(\theta),$$

admits a minimum in $\mathcal{M}_{p,n}$.

Example:

$$\mathcal{R}_\kappa(\theta) = \sum_{i,j} \left((\tau_i \lambda_j)^{-1} - \kappa^{-1} \right)^2$$

where λ_j are the eigenvalues of Σ .

KL divergence between NC-MSGs

$$\delta_{\text{KL}}(\theta_1, \theta_2) \propto \sum_{i=1}^n \frac{\tau_{1,i}}{\tau_{2,i}} \text{Tr}(\Sigma_2^{-1} \Sigma_1) + \sum_{i=1}^n \frac{1}{\tau_{2,i}} \Delta \mu^T \Sigma_2^{-1} \Delta \mu + n \log \left(\frac{|\Sigma_2|}{|\Sigma_1|} \right)$$

with $\Delta \mu = \mu_2 - \mu_1$.

Symmetrization: $\delta_{\mathcal{M}_{p,n}}(\theta_1, \theta_2) = \frac{1}{2} (\delta_{\text{KL}}(\theta_1, \theta_2) + \delta_{\text{KL}}(\theta_2, \theta_1))$.

Riemannian center of mass

Minimization of the KL variance:

$$\underset{\theta \in \mathcal{M}_{p,n}}{\text{minimize}} \quad \frac{1}{M} \sum_{i=1}^M \delta_{\mathcal{M}_{p,n}}(\theta, \theta_i)$$

Done with a Riemannian gradient descent.

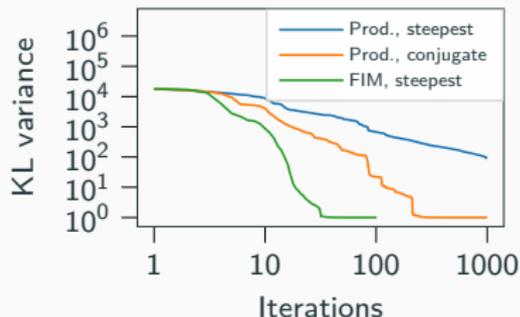


Figure 10: KL variance vs. iterations with $p = 10$, $n = 150$ and $M = 2$.

Breizhcrops dataset

Breizhcrops dataset¹:

- more than 600 000 crop time series across the whole Brittany,
- 13 spectral bands, 9 classes.

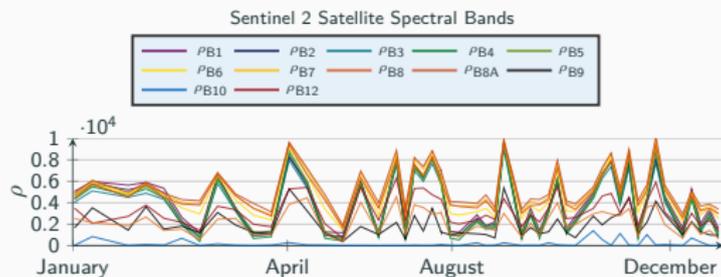


Figure 11: Reflectances ρ of a time series of meadows.


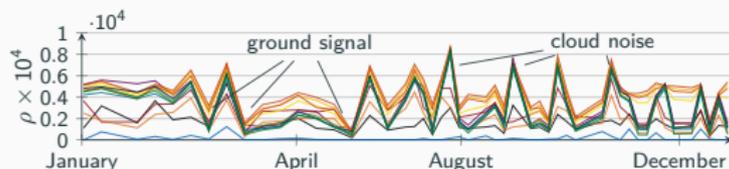


Figure 12: Reflectances ρ of a time series of corn.

¹<https://breizhcrops.org/>

Application to the *Breizhcrops* dataset

Parameter estimation + classification with a *Nearest centroid classifier*

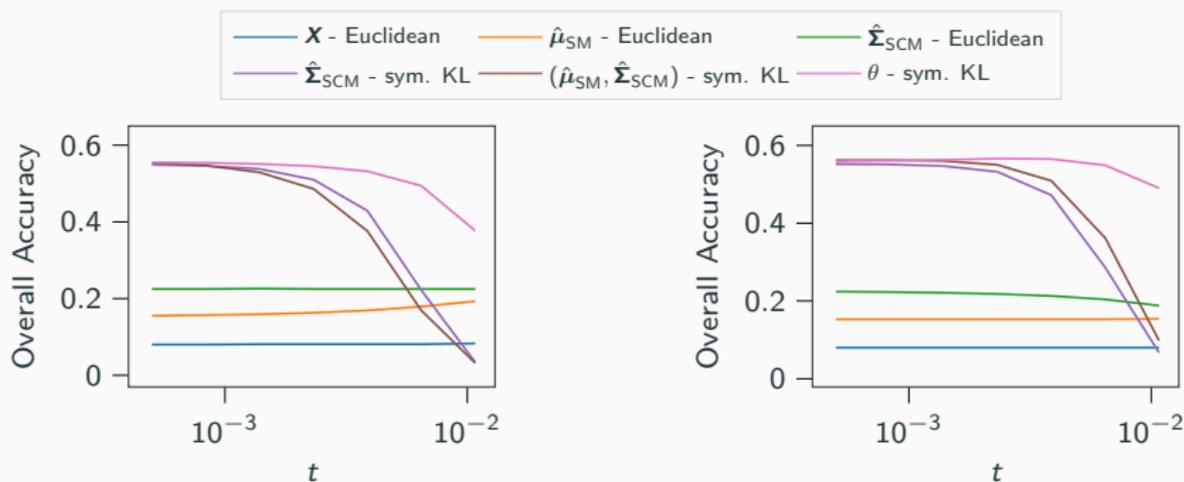


(a) Mean transformation:
 $x_i \mapsto x_i + \boldsymbol{\mu}(t)$ with $\boldsymbol{\mu}(0) = \mathbf{0}$

(b) Rotation transformation:
 $x_i \mapsto \mathbf{Q}(t)^T x_i$ with $\mathbf{Q}(0) = \mathbf{I}_p$

Figure 13: “Overall Accuracy” metric versus the parameter t associated with transformations applied to the test set. The proposed *Nearest centroid classifier* is “ θ - sym. KL”. The regularization is the L2 penalty and $\beta = 10^{-11}$.

Probabilistic PCA from heteroscedastic signals

Study of a “low rank” statistical model

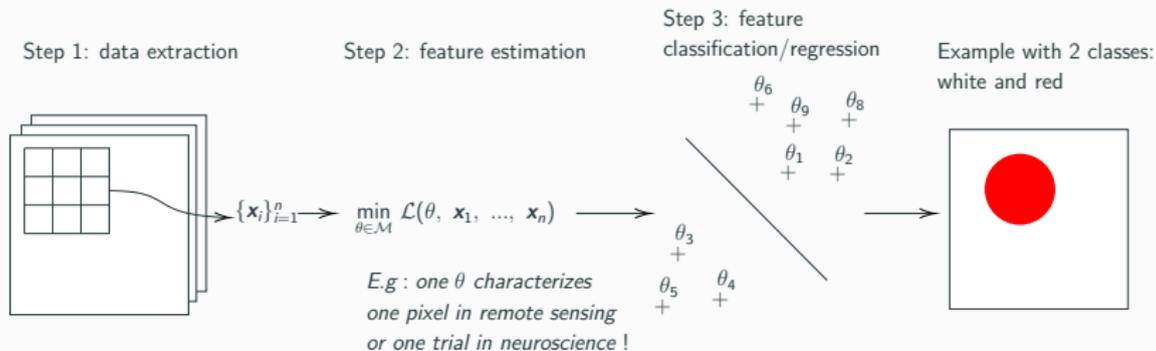

Statistical model

$x_1, \dots, x_n \in \mathbb{R}^p, \forall k < p:$

$$x_i \sim \mathcal{N}(\mathbf{0}, \tau_i \mathbf{U} \mathbf{U}^T + \mathbf{I}_p)$$


with $\tau_i > 0$ and $\mathbf{U} \in \mathbb{R}^{p \times k}$ is an orthogonal basis ($\mathbf{U}^T \mathbf{U} = \mathbf{I}_k$).

Goal: estimate and classify $\theta = (\mathbf{U}, \tau)$.

Study of a “low rank” statistical model

Statistical model

$$\underbrace{\mathbf{x}_i}_{\in \mathbb{R}^p} \stackrel{d}{=} \underbrace{\sqrt{\tau_i} \mathbf{U} \mathbf{g}}_{\text{signal} \in \text{span}(\mathbf{U})} + \underbrace{\mathbf{n}}_{\text{noise} \in \mathbb{R}^p}$$

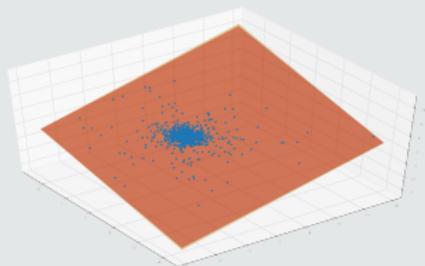

where $\mathbf{g} \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_k) \perp \mathbf{n} \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_p)$, $\boldsymbol{\tau} \in (\mathbb{R}_*^+)^n$, and $\mathbf{U} \in \mathbb{R}^{p \times k}$ s.t. $\mathbf{U}^T \mathbf{U} = \mathbf{I}_k$.

Maximum likelihood estimation

Minimization of the NLL with constraints, $\theta = (\mathbf{U}, \boldsymbol{\tau})$

- $\mathbf{U} \in \text{Gr}_{p,k}$: orthogonal basis of the subspace (and thus invariant by rotation !)
- $\boldsymbol{\tau} \in (\mathbb{R}_*^+)^n$: positivity constraints

$$\underset{\theta \in \text{Gr}_{p,k} \times (\mathbb{R}_*^+)^n}{\text{minimize}} \quad \mathcal{L}(\theta | \{\mathbf{x}_i\}_{i=1}^n)$$

Study of a “low rank” statistical model: estimation

Fisher information metric

$\forall \xi = (\xi_U, \xi_\tau), \eta = (\eta_U, \eta_\tau)$ in the tangent space

$$\langle \xi, \eta \rangle_\theta^{\text{FIM}} = 2nc_\tau \text{Tr}(\xi_U^T \eta_U) + k(\xi_\tau \odot (\mathbf{1} + \tau)^{\odot -1})^T (\eta_\tau \odot (\mathbf{1} + \tau)^{\odot -1}),$$

where $c_\tau = \frac{1}{n} \sum_{i=1}^n \frac{\tau_i^2}{1 + \tau_i}$.

Derivation of the Riemannian gradient and of a retraction.

To minimize the NLL: Riemannian gradient descent on $(\text{Gr}_{p,k} \times (\mathbb{R}_*^+)^n, \langle \cdot, \cdot \rangle^{\text{FIM}})$.

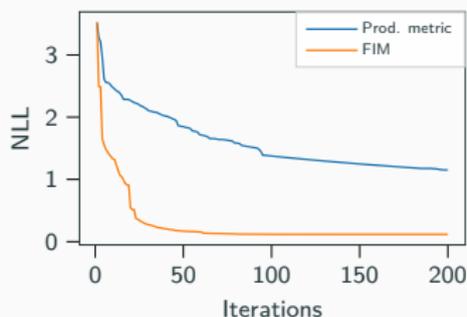


Figure 14: NLL versus the iterations.

Study of a “low rank” statistical model: bounds

Intrinsic Cramér-Rao bounds

Study of the performance through intrinsic Cramér-Rao bounds:

$$\overbrace{\mathbb{E}[d_{Gr,p,k}^2(\text{span}(\hat{\mathbf{U}}), \text{span}(\mathbf{U}))]}^{\text{subspace estimation error}} \geq \frac{(p-k)k}{nc_\tau} \approx \frac{(p-k)k}{n \times \text{SNR}}$$
$$\underbrace{\mathbb{E}[d_{(\mathbb{R}^+)^n}^2(\hat{\tau}, \tau)]}_{\text{texture estimation error}} \geq \frac{1}{k} \sum_{i=1}^n \frac{(1 + \tau_i)^2}{\tau_i^2}$$

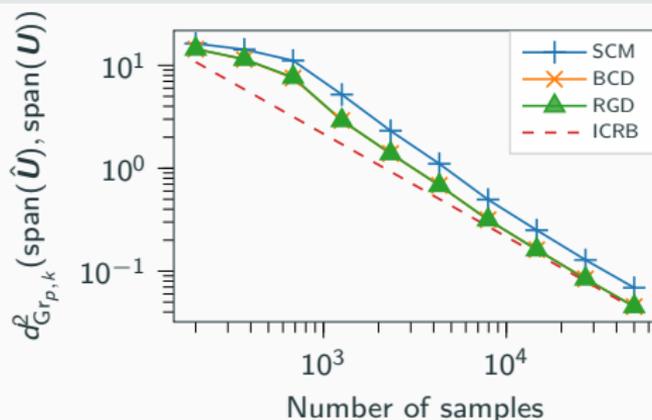


Figure 15: Mean squared error versus the number of simulated data.

Aligning M/EEG data to enhance predictive regression modeling

Generative model for regression with M/EEG

Linear instantaneous mixing model (from Maxwell's equations)

Signal $\mathbf{h}(t) \sim \mathcal{N}(\mathbf{0}, \Sigma)$:

$$\underbrace{\mathbf{h}(t)}_{\text{observed signal}} = \mathbf{A} \underbrace{\boldsymbol{\eta}(t)}_{\text{latent sources}}$$

Covariance matrix:

$$\Sigma = \mathbb{E}_t[\mathbf{h}(t)\mathbf{h}(t)] = \mathbf{A} \text{diag}(\mathbf{p}) \mathbf{A}^\top$$

with $\mathbf{p} = \text{Var}(\boldsymbol{\eta}(t))$.

Regression model, $(\Sigma_i, y_i)_{i=1}^n$

$\exists \boldsymbol{\beta} \in \mathbb{R}^p$ s.t.:

$$y_i = \boldsymbol{\beta}^\top \log(\mathbf{p}_i) + \varepsilon_i$$

Neglecting ε_i , $\exists \boldsymbol{\beta}'$ s.t.

$$y_i = \boldsymbol{\beta}'^\top \underbrace{\text{vec} \left(\log(\bar{\Sigma}^{-\frac{1}{2}} \Sigma_i \bar{\Sigma}^{-\frac{1}{2}}) \right)}_{\in T_I \mathcal{S}_p^{++}}$$

where $\bar{\Sigma}$ is the Riemannian mean of $\{\Sigma_i\}_{i=1}^n$.

David Sabbagh et al. "Manifold-regression to predict from MEG/EEG brain signals without source modeling". In: *Advances in Neural Information Processing Systems* 32 (2019)

Statistics on the SPD manifold

Gaussian distribution on \mathcal{S}_p^{++} and normalization

$$f(\Sigma; \bar{\Sigma}, \sigma^2) = \frac{1}{Z(\sigma)} \exp\left(-\frac{d_{\mathcal{S}_p^{++}}^2(\Sigma, \bar{\Sigma})}{2\sigma^2}\right)$$

with $Z(\sigma)$ the normalization constant.

If $\Sigma \sim f(\cdot; \bar{\Sigma}, \sigma^2)$, then $\phi_{\bar{\Sigma}, \sigma^2}(\Sigma) = \left(\bar{\Sigma}^{-\frac{1}{2}} \Sigma \bar{\Sigma}^{-\frac{1}{2}}\right)^{\frac{1}{\sigma}} \sim f(\cdot; I, 1)$.

Salem Said et al. "Riemannian Gaussian Distributions on the Space of Symmetric Positive Definite Matrices". In: *IEEE Transactions on Information Theory* 63.4 (2017), pp. 2153–2170

Estimation with $(\Sigma_i)_{i=1}^n \sim f(\cdot; \bar{\Sigma}, \sigma^2)$

$$\hat{\Sigma} = \arg \min_{\Sigma \in \mathcal{S}_p^{++}} \frac{1}{n} \sum_{i=1}^n d_{\mathcal{S}_p^{++}}^2(\Sigma, \Sigma_i), \quad \hat{\sigma}^2 = \frac{1}{n} \sum_{i=1}^n d_{\mathcal{S}_p^{++}}^2(\hat{\Sigma}, \Sigma_i)$$

Domain adaptation: for $\mathcal{D} \in \{\mathcal{S}, \mathcal{T}\}$

$$\Sigma_i^{\mathcal{D}} \leftarrow \phi_{\hat{\Sigma}, (\hat{\sigma}^2)^{\mathcal{D}}}(\Sigma_i^{\mathcal{D}})$$

Results on MEG data

Brain age prediction on the Cam-CAN dataset:

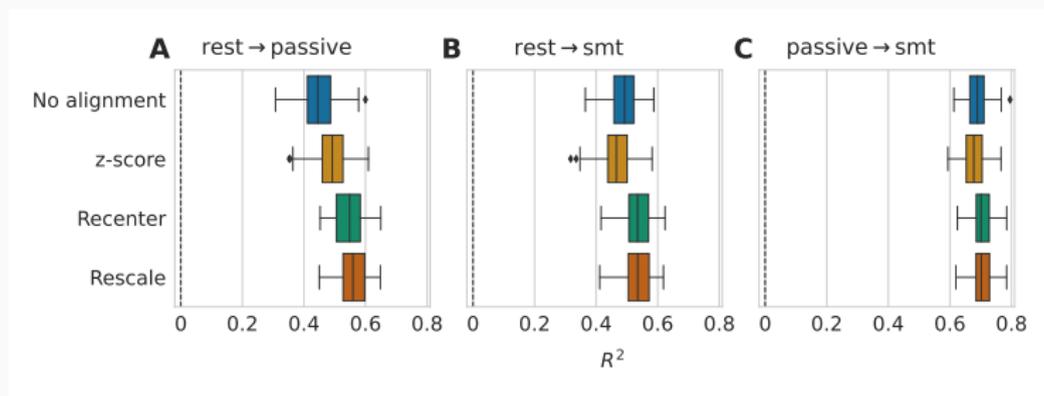


Figure 16: R^2 score on the Cam-CAN dataset (MEG), $n = 646$, 306 channels reduced to $p = 65$ after PCA and age range of 18 – 89 years old.

Results on EEG datasets: LEMON \rightarrow TUAB

Brain age prediction on the LEMON \rightarrow TUAB datasets, regression on supervised SPoC components: $\text{diag}(\log(\mathbf{W}_{\text{SPoC}} \boldsymbol{\Sigma}_i \mathbf{W}_{\text{SPoC}}^\top))$.



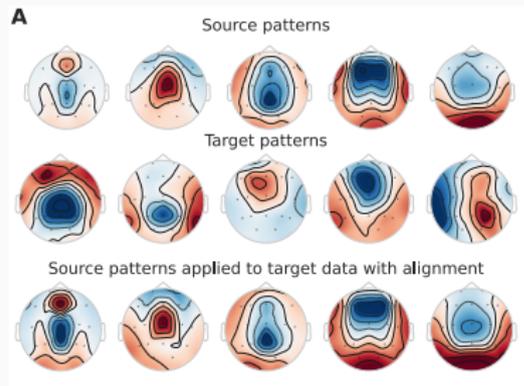


Figure 17: Left: R^2 score on LEMON ($n = 1385$) \rightarrow TUAB ($n = 213$) (EEG), and $p = 15$ after PCA. Dashed line is the R^2 score of a cross-validation on target dataset. Right: topomaps of the SPoC patterns.

Many other results in the paper: simulations, rotation corrections, ...

Open source software and conclusions

Open source software

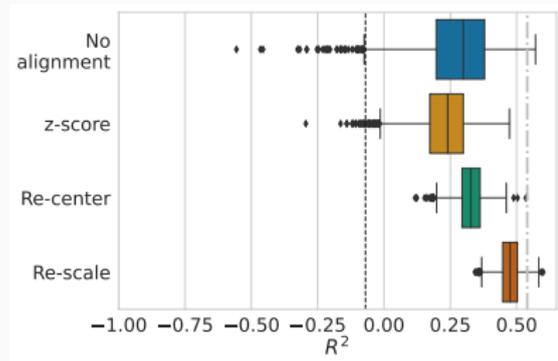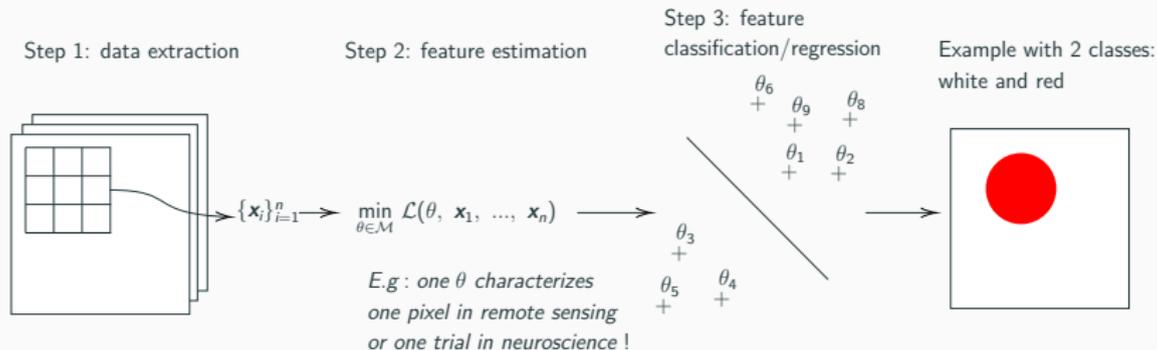

pyCovariance (creator)

- `_FeatureArray`: custom data structure to store batch of points of product manifolds,
- implements statistical manifolds from this presentation,
- automatic computation of Riemannian centers of mass using `exp/log` or `autodiff`
- *K-means++* and *Nearest centroid classifier* on any Riemannian manifolds,
- 15K lines of code, 96% of test coverage.

pyManopt (maintainer)

$$\underset{\theta \in \mathcal{M}}{\text{minimize}} f(\theta)$$

Provide f smooth, choose a Riemannian manifold \mathcal{M} , and pyManopt does the rest !

Geomstats: information geometry module (co-creator)

Choose a statistical manifold \mathcal{M} (or give a p.d.f. !), and Geomstats does the rest: geodesics, log, exp, barycenter, leaning: K-means, KNN, PCA, etc...

A. Le Brigant, J. Deschamps, **A. Collas** and N. Miolane, "Parametric information geometry with the package Geomstats" ACM Transactions on Mathematical Software 2023.

References

References



Barachant, Alexandre, Stéphane Bonnet, Marco Congedo, and Christian Jutten. "Multiclass Brain–Computer Interface Classification by Riemannian Geometry". In: *IEEE Transactions on Biomedical Engineering* 59.4 (2012), pp. 920–928.



Boumal, Nicolas. *An introduction to optimization on smooth manifolds*. Cambridge University Press, 2023.



Collas, Antoine, Florent Bouchard, Arnaud Breloy, Guillaume Ginolhac, Chengfang Ren, and Jean-Philippe Ovarlez. "Probabilistic PCA from heteroscedastic signals: geometric framework and application to clustering". In: *IEEE Transactions on Signal Processing* 69 (2021), pp. 6546–6560.



Collas, Antoine, Arnaud Breloy, Chengfang Ren, Guillaume Ginolhac, and Jean-Philippe Ovarlez. "Riemannian optimization for non-centered mixture of scaled Gaussian distributions". In: *IEEE Transactions on Signal Processing* (2023).



Le Brigant, Alice, Jules Deschamps, **Antoine Collas**, and Nina Miolane. "Parametric information geometry with the package Geomstats". In: *ACM Transactions on Mathematical Software* (2022).



Mellot, Apolline, **Antoine Collas**, Pedro L. C. Rodrigues, Denis Engemann, and Alexandre Gramfort. "Harmonizing and aligning M/EEG datasets with covariance-based techniques to enhance predictive regression modeling". In: *Imaging Neuroscience* (Nov. 2023). ISSN: 2837-6056. DOI: 10.1162/imag_a_00040.



Sabbagh, David, Pierre Ablin, Gaël Varoquaux, Alexandre Gramfort, and Denis A Engemann. "Manifold-regression to predict from MEG/EEG brain signals without source modeling". In: *Advances in Neural Information Processing Systems* 32 (2019).



Said, Salem, Lionel Bombrun, Yannick Berthoumiou, and Jonathan H. Manton. "Riemannian Gaussian Distributions on the Space of Symmetric Positive Definite Matrices". In: *IEEE Transactions on Information Theory* 63.4 (2017), pp. 2153–2170.

Riemannian geometry for statistical estimation and learning: applications to remote sensing and M/EEG

Antoine Collas

S3 seminar - L2S, CentraleSupélec

Inria



université
PARIS-SACLAY